


(21) Application No. 4221/72 (22) Filed 28 Jan. 1972
(31) Convention Application No. 132494 (32) Filed 8 April 1971 in
(33) United States of America (US)
(44) Complete Specification published 26 Feb. 1975
(51) INT CL³ F02M 3/08 F16K 31/00
(52) Index at acceptance
F1B 2G16
F2V T4B

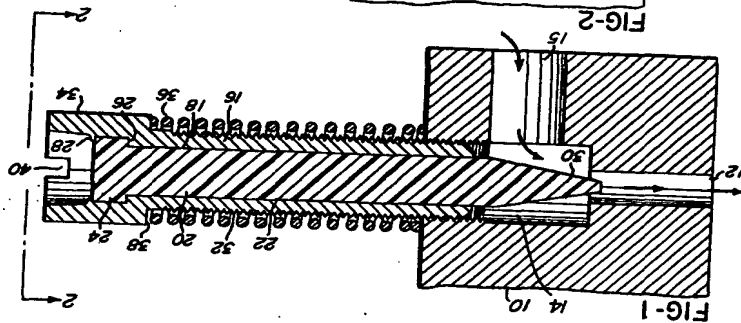

(54) THERMALLY RESPONSIVE VALVE ASSEMBLY

(71) WE, VERNAY LABORATORIES, INC., of 116 College Street, Yellow Springs, Ohio 45387, United States of America, a corporation organised under the laws of the State of Ohio, United States of America, do hereby declare the invention, for which we pray that a patent may be granted to us, and the method by which it is to be performed, to be particularly described in and by the following statement:—

It is often desirable to regulate the flow of a fluid through a port in response to changes in temperature. For example, United States patent specification 3,340,853, discloses a thermally responsive valve assembly in which the valve member is secured to the outer portion of the valve shell. The valve member is secured to the outer portion of the valve shell by a core member which is secured to the inner portion of the valve shell. The valve member is secured to the outer portion of the valve shell by a core member which is secured to the inner portion of the valve shell.

The valve assembly according to the invention is responsive to changes in temperature, the valve core member being used to regulate the effective cross-sectional area of the port to control fluid flow therethrough. The valve device, itself, consists of only two parts, namely the valve shell and core member, and hence may be very inexpensive to manufacture, relatively rugged and maintenance-free. When in use, the valve device may be screwed into the outer portion of the port so that the projecting end of the valve core is positioned within the inner portion of the port for regulating fluid flow therethrough. Since the materials of which the shell and core are formed have coefficients of linear thermal expansion which differ greatly from each other, changes in temperature will cause either the valve core or the shell to expand, advancing or retracting the projecting end of the core into or out of the inner portion of the port and varying the effective open area of the port. Since the lengths of the core and shell may be much greater than their diameters, expansion and contraction will be principally in the longitudinal direction. The present invention may, therefore, provide a compact, relatively simple and inexpensive valve assembly which, nevertheless, provides accurate control over fluid flow through a port in response to temperature changes.

In order that the invention may be more readily understood, reference will now be made to the drawings, in which:

FIG. 1 is a longitudinal section of a thermally responsive valve assembly, showing a valve member (28) with a core member (30) and a valve shell (32). The valve member is secured to the outer portion of the valve shell by a core member which is secured to the inner portion of the valve shell. The valve member is secured to the outer portion of the valve shell by a core member which is secured to the inner portion of the valve shell.

The valve assembly according to the invention is responsive to changes in temperature, the valve core member being used to regulate the effective cross-sectional area of the port to control fluid flow therethrough. The valve device, itself, consists of only two parts, namely the valve shell and core member, and hence may be very inexpensive to manufacture, relatively rugged and maintenance-free. When in use, the valve device may be screwed into the outer portion of the port so that the projecting end of the valve core is positioned within the inner portion of the port for regulating fluid flow therethrough. Since the materials of which the shell and core are formed have coefficients of linear thermal expansion which differ greatly from each other, changes in temperature will cause either the valve core or the shell to expand, advancing or retracting the projecting end of the core into or out of the inner portion of the port and varying the effective open area of the port. Since the lengths of the core and shell may be much greater than their diameters, expansion and contraction will be principally in the longitudinal direction. The present invention may, therefore, provide a compact, relatively simple and inexpensive valve assembly which, nevertheless, provides accurate control over fluid flow through a port in response to temperature changes.

In order that the invention may be more readily understood, reference will now be made to the drawings, in which:

FIG. 1 is a longitudinal section of a thermally responsive valve assembly, showing a valve member (28) with a core member (30) and a valve shell (32). The valve member is secured to the outer portion of the valve shell by a core member which is secured to the inner portion of the valve shell. The valve member is secured to the outer portion of the valve shell by a core member which is secured to the inner portion of the valve shell.

made to the accompanying drawing, in which:—

Fig. 1 is a cross-sectional view through one embodiment of the invention, and

Fig. 2 is a view taken on line 2-2 of Fig. 1.

1. A portion 10 of a wall, for example, of a chamber, is provided with a port comprising an enlarged outer portion 14 and a substantially coaxial inner portion 12. An inlet 15 intersects the port. The enlarged portion 14 is threaded at its outer end and to this portion is secured a substantially cylindrical valve casing or shell member 16 having an internal bore 18 extending axially thereof. An elongated, unitary, rod-like valve core member 20 is received in the bore of the valve shell, and is provided with a shank portion 22 of sufficiently smaller diameter than the internal diameter of the bore 18 to permit free movement of the shank portion 22 within the bore 18. One end 24 of the valve core 22 is enlarged to provide a shoulder 26 which abuts against an opposing shoulder of the casing 16 and is fixed in this position in any convenient manner, such as by deforming a portion of the casing into contact with the outer surface of the enlarged portion 24, as at 28. The opposite end 30 of the valve core 20 is conically shaped and protrudes outwardly of the valve shell and into the inner portion 12 of the flow port.

The outer surface of at least a portion of the shell 16 is provided with external threads 32 which are complementary to the internal threads of the outer portion 14 to permit the casing or shell of the valve member to be threaded into the wall 10. The casing or shell 16 is also provided with an enlarged portion 34 and a coil spring 36 surrounds the shank of the casing 16 and bears at one end against the wall 10 and at its opposite end against the shoulder 38 formed by the enlarged portion 34. It will also be noted from Figs. 1 and 2 that the enlarged portion of the casing 16 is provided with a tool engageable portion such as a slot 40.

The valve device, which consists of the valve casing or shell member 16 and the valve core member 20, will usually be assembled at one point and shipped as a unit to another point for attachment to the wall 10. To attach the valve device the casing 16 is screwed into the wall 10 until the desired clearance is achieved and the conically shaped outwardly protruding portion 30 of the valve core 20 is positioned within the desired flow area through the inner portion 12 of the port at the then prevailing ambient temperature. The spring 36, bearing against the shoulder 38 and the wall 10, serves to maintain the casing 16 and the core 20 in this preset position.

120
125
130

having 20-40% glass fibre will also function satisfactorily. Thus, forming one of the members, either the shell or the core, of steel and the remaining member of polyvinylidene fluoride, the coefficient of linear thermal expansion of the member formed of polyvinylidene fluoride will be approximately twenty times that of the member formed of steel.

10 Regardless of the specific materials utilized, although of course, the materials selected must be compatible with the temperatures and fluids expected to be encountered, it will be seen that the present invention provides a thermally responsive valve assembly in which either the valve core member, itself, or the valve casing or shell member, also serves as the actuating mechanism, and in which the construction is extremely simple thereby providing an inexpensive, compact and maintenance-free construction.

WHAT WE CLAIM IS:—

1. A thermally responsive valve assembly comprising a wall having a port which includes an outer portion and a substantially coaxial inner portion, a substantially cylindrical valve shell member secured to the outer portion of the port, a rod-like valve core member slidable in the valve shell member, one end of the valve core member being fixed to an adjacent portion of the valve shell member and the opposite end of the valve core member projecting from the valve shell member into the inner portion of the port, the coefficient of linear thermal expansion of one of said valve members being substantially greater than the coefficient of linear thermal expansion of the other of said members so as to cause said opposite end of the valve core member to move into and out of the inner portion of the port and thereby regulate flow through the inner portion of the port.

2. An assembly as claimed in claim 1, wherein said opposite end of the valve core member is of substantially conical configuration.

3. An assembly as claimed in claim 1 or 2, wherein the valve shell member has external threads and a tool engageable portion and is engaged with internal threads in the outer portion of the port.

4. An assembly as claimed in claim 1, 2 or 3, wherein a coil spring encircles the valve shell member and bears against the wall at

one end and an enlarged outer end of the valve shell member at its opposite end.

5. An assembly as claimed in claim 1, 2, 3 or 4, including an inlet intersecting the port.

6. An assembly as claimed in any one of the preceding claims, wherein one of said valve members is formed of a relatively rigid, organic polymeric material.

7. An assembly as claimed in claim 6, wherein said material comprises polyvinylidene fluoride.

8. An assembly as claimed in claim 6, wherein said material comprises polyethylene.

9. An assembly as claimed in claim 6, wherein said material comprises nylon.

10. An assembly as claimed in claim 6, wherein said material comprises an acrylic compound.

11. An assembly as claimed in claim 6, wherein said material comprises an acetal resin.

12. An assembly as claimed in any one of the preceding claims 6 to 11, wherein the other valve member is formed from steel.

13. An assembly as claimed in any one of the preceding claims 1 to 11, wherein the coefficient of linear thermal expansion of one of said valve members is at least three times greater than the coefficient of linear thermal expansion of the other of said members.

14. An assembly as claimed in any one of the preceding claims 1 to 11, wherein the coefficient of linear thermal expansion of one of said valve members is approximately fifteen times greater than the coefficient of linear thermal expansion of the other of said members.

15. A thermally responsive valve assembly constructed substantially as hereinbefore described with reference to the accompanying drawings.

16. A circulator incorporating a thermally responsive valve assembly as claimed in any one of the preceding claims.

BARON & WARREN,
16, Kensington Square,
London, W8 5HL,
Chartered Patent Agents.

References has been directed in pursuance of section 9, subsection (1) of the Patents Act 1949, to Patent No. 1,293,769.

Printed for Her Majesty's Stationery Office, by the Courier Press, Leamington Spa, 1976.
Published by The Patent Office, 25 Southampton Buildings, London, W.C.2A 1AL, from which copies may be obtained.